



hinge manipulator


up to 600 kg (1,322 lbs) load capacity

neptune evolution
compact + robust hinge

esmo
semicon

key features

- touch-screen-operated user interface
- fully motorized
- intuitive menu navigation + detailed display information
- password-protected control options for operator + docking modes
- SD card function for remote maintenance measures + software updates
- z-axis tactility adjustment based on customer specifications
- fully automated work sequences + individual docking height settings
- direct connection to prober
- linear, vertical motions for linear docking | linear footing (optional)
- cable management (optional)
- twist/tumble motion (optional)
- tactile test head mounting for stress-free docking
- two-button operation
- programmable docking configurations
- compatible with a wide range of test heads applicable to all available probers in the market

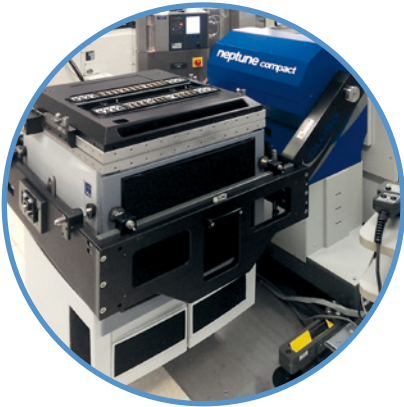

esmo Europe Rosenheim esmo AG Brueckenstrasse 1 83022 Rosenheim Germany P +49 (8031) 233 88 0 F +49 (8031) 233 88 10 sales@esmo-ag.com	esmo USA Sacramento esmo USA Corp. 1020 Winding Creek Road Suite #120 Roseville, California 95678 USA P +1 (916) 307 6345 F +1 (916) 307 6341 sales@esmo-usa.com	esmo Asia Singapore esmo Asia Pte. Ltd. 115 Eunoz Avenue 3 #05-03 Singapore 409839 Singapore P +65 (656) 288 57 F +65 (656) 288 60 sales@esmo-asia.com	esmo China Shanghai esmo Asia North Co. Ltd. Building 5-6 N. 388 Xin Run Rd. Xin Qiao Industrial Zone Song Jiang District 201612 Shanghai · China P +86 (21) 5768 7228 + ex. 201 F +86 (21) 5768 7132 info@esmo-ag.com.cn	esmo Taiwan Zhubei esmo TW Ltd. Co. 9F., No. 247, Dong Sec. 1, Guangming 6th Rd., Zhubei City · Hsinchu County 302044 · Taiwan (R.O.C.) M +886 932-290-662 M +886-988-313-705 sales@esmo-asia.com
--	---	---	--	--